

★ 635nm 15mW 50°C Reliable Operation

● Features

1. High Visibility
2. High temperature operation
3. High FFP deviation angle

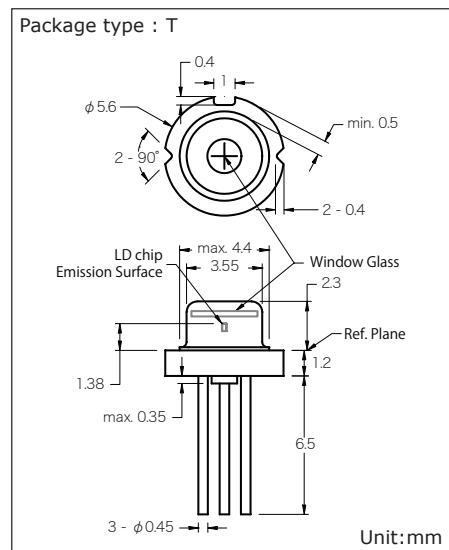


Fig.1:Outside view






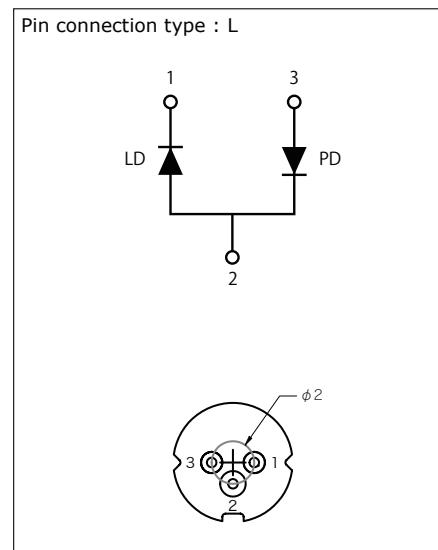


Fig.2:Pin connection

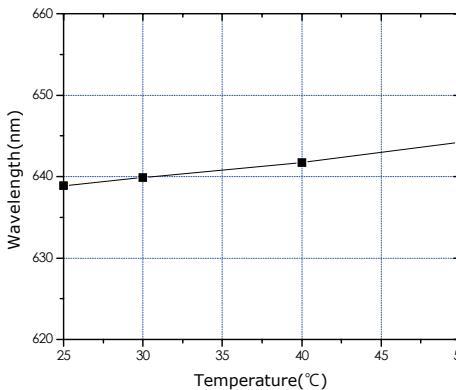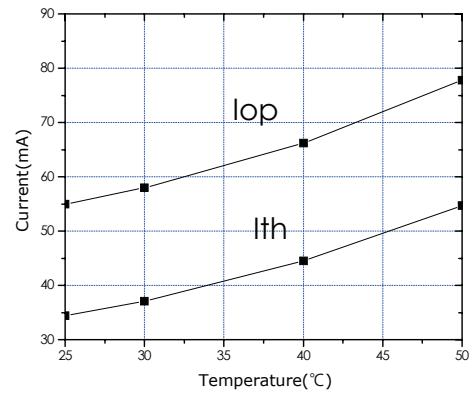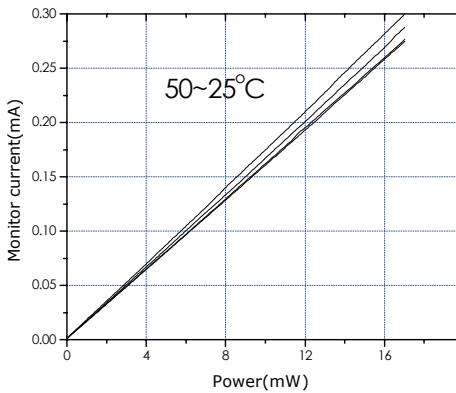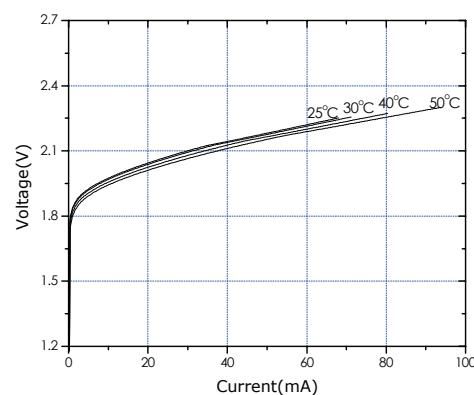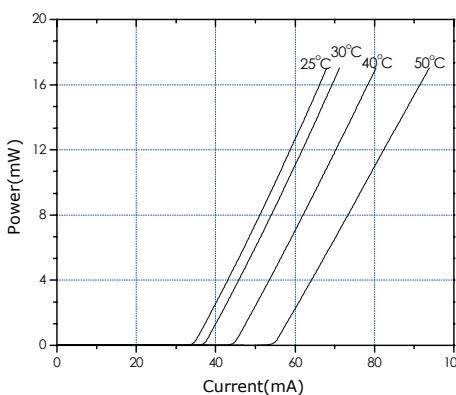

● Absolute maximum ratings

Parameter	Symbol	Condition	Rating	Unit
Light output power	P _o	CW	17	mW
Reverse voltage (LD)	V _{RL}	-	2	V
Reverse voltage (PD)	V _{RD}	-	30	V
Forward current (PD)	I _{FD}	-	10	mA
Case temperature	T _c	-	-10~+50	°C
Storage temperature	T _s	-	-40~+85	°C

● Electrical and optical characteristics ($T_c=25^\circ\text{C}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Peak wavelength	λ	630	636	640	nm	P _o =15mW
Threshold current	I _{th}	-	33	45	mA	
Operating current	I _{op}	-	66	80	mA	P _o =15mW
Operating voltage	V _{op}	-	2.3	2.6	V	P _o =15mW
Differential efficiency	η	0.3	0.45	0.7	mW/ma	P _o =10-15mW
Monitor current	I _m	0.1	0.2	0.4	mA	P _o =15mW, V _{RD} =5V
Parallel divergence angle	$\theta_{//}$	6.0	7.5	10	deg	P _o =15mW
Perpendicular divergence angle	θ_{\perp}	30	33	38	deg	
Parallel FFP deviation angle	$\Delta\theta_{//}$	-2	0	+2	deg	
Perpendicular FFP deviation angle	$\Delta\theta_{\perp}$	-2	0	+2	deg	
Emission point accuracy	$\Delta x \Delta y \Delta z$	-80	0	+80	μm	

● Precautions

- * Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- * Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- * Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- * Observing visible or invisible laser beams with the human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- * No laser device should be used in any application or situation where life or property is at risk in event of device failure.
- * Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.